


Quilt Outreach Windmill Quilt Crib

20 Blocks
Finished quilt size: 46" by 56"
Block layout: 4 by 5
Finished block size: 10"
Finished border: 3" on each side
Seam allowance: 1/4"
Stitch size: 12 stitches per inch

Figure 1

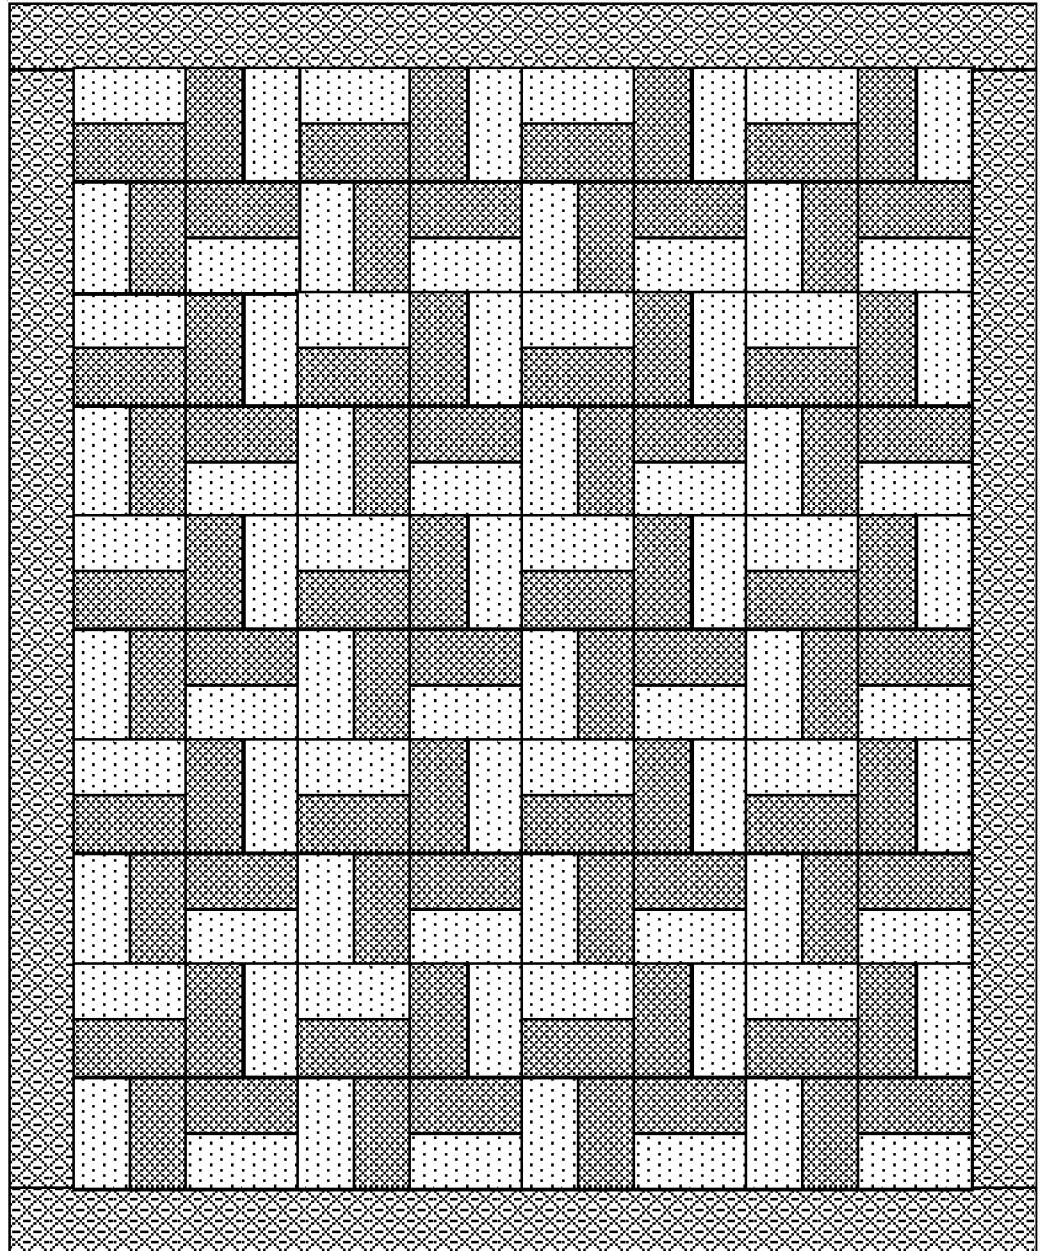

Kit I - Single Blade Windmill

Blocks:

- * 12 strips (3" by 42") or 10 strips (3" by 44") of Fabric A (dark fabric)
- * 12 strips (3" by 42") or 10 strips (3" by 44") of Fabric B (light fabric)

Border:

5 strips (3-1/2" by 42") of border fabric

Assembly Instructions

1. Take a strip of Fabric A and a strip of Fabric B. Place right sides together and sew the two strips together the full length, as shown in Figure 2. Make 28 (or 24 if using long strips) sets of strips.
2. Press seam allowances toward the dark fabric on each set of strips.
3. Trim the selvages off the strips, and then cut the strips into 5-1/2" wide segments, as shown in Figure 3. Each segment should measure 5-1/2" square.
4. To make a pinwheel block, take 4 of the 5-1/2" squares, turn each square 1/4 turn, and sew together, as shown in Figure 4. Make 20 blocks.
5. Sew the blocks together, following the layout in Figure 1. Press your seam allowances to the left for rows 1, 3, & 5. Press your seam allowances to the right for rows 2 & 4.

Figure 2



Figure 3


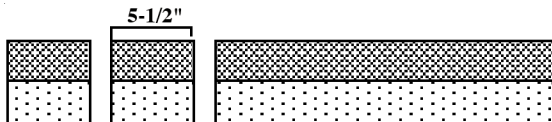


Figure 4



Adding the Border

1. Trim the selvages off the border strips and sew the strips together, forming one long border strip.
2. Add the side borders by measuring the sides of the quilt top and cutting the border strips to size. Pin each border strip to the sides of the quilt top, starting at each end and center point, then in between, avoiding any puckering around the pins. Stitch the border. Press.
3. Repeat Step 2 for the top and bottom borders.

Finishing the Quilt

1. Lay out the batting. Spread the backing right side up on the batting. Spread the quilt top right side down on the backing.
2. Pin around all the sides, leaving a 12" opening in the middle of one long side.
3. Trim the backing and batting to match the quilt top.
4. Stitch the layers together using a 1/2" seam allowance. Make sure to leave the 12" opening unsewn.
5. Turn the quilt with right side out by rolling it up and pulling the right side through the opening.
6. Pin the opening closed and topstitch the edge twice—first 1/4" & then 3/4" from the outside edge.
7. Machine quilt the border, if desired (this makes a sturdier quilt). Tie the quilt.

Kit II - Double Blade Windmill

Blocks:

- * 12 strips (1-3/4" by 42") or 10 strips (1-3/4" by 44") of Fabric A (dark fabric)
- * 12 strips (1-3/4" by 42") or 10 strips (1-3/4" by 44") of Fabric B (medium fabric)
- * 12 strips (3" by 42") or 10 strips (3" by 44") of Fabric C (light fabric)

Border:

5 strips (3-1/2" by 42") of border fabric

Assembly Instructions

1. Sew the strips of Fabrics A, B, and C together as shown in Figure 5.
2. Press seam allowances toward the darker fabrics on each set of strips.
3. Trim the selvages off the strips, and then cut the strips into 5-1/2" wide segments, as shown in Figure 6. Each segment should measure 5-1/2" square.
4. To make a pinwheel block, take 4 of the 5-1/2" squares, turn each square 1/4 turn, and sew together, as shown in Figure 7. Make 20 blocks.
5. Sew the blocks together, following the layout in Figure 1. Press your seam allowances to the left for rows 1, 3, and 5. Press your seam allowances to the right for rows 2 and 4.

Figure 5



Figure 6

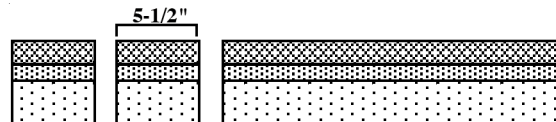


Figure 7

